

REFRIGERATOR/FREEZER INSTRUCTION MANUAL



Table of Contents

Safety Tips.....	1
Introduction.....	1
Pack Contents.....	1
Installation.....	1
Lock/Unlock the Doors.....	1
Fitting the Shelves.....	2
Operation.....	2
Storing Food.....	2
Turn On.....	2
Manual Defrost.....	2
Control Panel.....	2
Cleaning, Care & Maintenance.....	4
Cleaning the Condenser	4
Troubleshooting.....	4
Technical Specifications.....	4
Electrical Wiring.....	- 5
Disposal.....	5
Compliance.....	5

Safety Tips

- Position on a flat,stable surface.
- A service agent/qualified technician should carry out installation and any repairs if required.Do not remove any components or service panels on this product.
- Consult Local and National Standards to comply with the following:
 - Health and Safety at Work Legislation
 - BS EN Codes of Practice
 - Fire Precautions
 - IEE Wiring Regulations
 - Building Regulations
- DO NOT use jet/pressure washers to clean the appliance.
- DO NOT use the appliance outside.
- DO NOT use this appliance to store medical supplies.
- DO NOT use electrical appliances inside the appliance(e.g.heaters,ice-cream makers etc.)
- DO NOT stand or support yourself on the base,drawers or doors.
- DO NOT allow oil or fat to come into contact with the plastic components or door seal.Clean immediately if contact occurs.
- Bottles that contain a high percentage of alcohol must be sealed and placed vertically in the refrigerator.
- Always carry,store and handle the appliance in a vertical position and move by holding the base of the appliance.
- Always switch off and disconnect the power supply to the unit before cleaning.
- Keep all packaging away from children.Dispose of the packaging in accordance with the regulations of local authorities.
- If the power cord is damaged,it must be replaced by an agent or a recommended qualified technician in order to avoid a hazard.

Introduction

Please take a few moments to carefully read through this manual.Correct maintenance and operation of this machine will provide the best possible performance from your product.

Pack Contents

The following is included:

- Refrigerator or Freezer
- Keys x2
- Shelves x 3 (Single)/x 6(Double)
- Shelf guides x 6(Single) /x 12 (Double)
- Instruction manual

We pride ourself on quality and service,ensuring that at the time of packaging the contents are supplied fully functional and free of damage.Should you find any screws damage as a result of transit,please contact your dealer immediately.

Installation

Note:If the appliance has not been stored or moved in an upright position,let it stand upright for approximately 12 hours before operation.If in doubt allow the appliance to stand.

- 1.Remove the appliance from the packaging.Make sure that all protective plastic film and coatings are thoroughly removed from all surfaces.
2. Maintain a distance of 20cm(7 inches)between the unit and walls or other objects for ventilation. Increase this distance if the obstacle is a heat source.

Note:Before using the appliance for the first time,clean the shelves and interior with soapy water.

Lock/Unlock the Doors

A lock is fitted to the doors to ensure foodstuffs are kept secure within your appliance.
Use the keys provided to lock/unlock the door

Fitting the Shelves

- 1.Place one set of shelf guides on either side of the cabinet at the desired height.
- 2.Slide the shelf into place.
- 3.Repeat for the remaining shelves.

Note:This is vital for ensuring correct drainage of condensation.

Operation

Storing Food

To get the best results from your appliance, follow these instructions:

- Only store foodstuffs in the appliance when it has reached the correct operating temperature.
- Do not place uncovered hot food or liquid inside the appliance.
- Wrap or cover food where possible.
- foodstuffs must be stored below the maximum line marked within the appliance.
- Do not obstruct the fans inside the appliance.
- Avoid opening the doors for prolonged periods of time.

Note:The base of the cabinet, including the area behind the mullion, could be considered as shelf as it is indicated in the instructions for use as suitable for storing of goods.

Turn On

- 1.Close the door(s)of the appliance.
- 2.Switch on the power and turn on at the socket.
- 3.Following a beep from the display, the current temperature within the appliance is displayed.

Manual Defrost

Defrost will start automatically 2hours after the appliance is initially powered up.
and then defrosting time will be adjusted according to the condition of the frost.

To manually defrost the appliance:


1.Press and hold the DEFROST  button for 3 seconds.

2.The defrost cycle will start immediately and the Defrost LED illuminates.

Note:Starting a manual defrost also resets the automatic defrost timer.The next automatic defrost will start automatically according to the frost condition.

3. Waste water will evaporate after being collected in the waste water tray

Control Panel

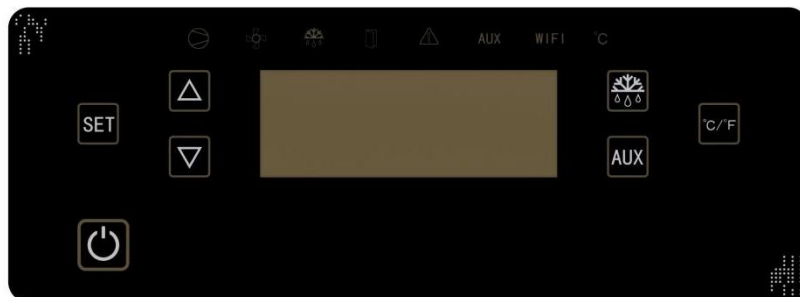

Important notice: Without any action on 15 seconds on the key board,it will be locked .when you press a button you will see «Lock» on the screen. In order to unlock the product,you should press the two button   at the same time and hold for 3 second. You will hear two beeps,that means it is unlocked.

1.Main display window

 On different display mode,it shows temperature value,
menu code and value,alarming and error code.

Displaying mode: main display window does not flash.

Setting mode: main display window is flashing

Note: Turn on the power,you will hear a beep.Then the temperature value within the appliance is displayed.

2. Indicator and description

Indicator	Status	Meaning
	Stable Lighting	Refrigerating
	Light flashing	The compressor is waiting to start
	Stable Lighting	evaporator fan is running.
	Light Flashing	Delaying time after defrosting
	Stable Lighting	Defrosting, DEF is displayed
	Light Flashing	Dripping during defrosting;or Delaying when waiting for hot air defrosting
	Light Flashing	The door is open or not properly closed.
	Light Flashing	Condense temperature sensor reach the warning value,failure warning
AUX	Stable Lighting	Auxiliary function(customized)start,Auxiliary timer close(discharge pump manually operate)
wifi	Stable Lighting	Wifi turn on
	Stable Lighting	Display current temperature in Celsius degree
	Stable Lighting	Display current temperature in Fahrenheit degree

3.Key and Function

Icon	Key	Function
	Setting key	enter programming mode
		choose a parameter
	Increase key	check the parameter value
		increase the value
	Decrease Key	check the parameter value
		decrease the value
	Manual discharge key	turn on/off the drain pump
	Mute and °C/°F shift	Pause alarm
		shift to Celsius or Fahrenheit
	Manual defrost key	start a defrosting process
		end the defrosting process
	Stand-by key	return to set mode
		On/stand-by

Cleaning,Care Maintenance

Switch off and disconnect from the power supply before cleaning.

Clean the interior of the appliance as often as possible.

Do not use abrasive cleaning agents. These can leave harmful residues.

Clean the door seal with water only.

Always wipe dry after cleaning.

Do not allow water used in cleaning to run through the drain hole into the evaporation pan.

Take care when cleaning the rear of the appliance. Sharp edges can cut.

An agent or qualified technician must carry out repairs if required.

Cleaning the Condenser and air filter

Periodically cleaning the condenser and air filter can extend the life of the appliance.

We recommend that our agent or qualified technician clean the condenser.

Safety Note: step on a higher place when clean the condenser

Troubleshooting

If your appliance develops a fault, please check the following table before making a call to your retailer.

Fault	Probable Cause	Action
The appliance is not working	The unit is not switched on	Check the unit is plugged in correctly and switched on
	Plug and lead are damaged	Call your agent or qualified Technician
	Fuse in the plug has blown	Replace the fuse
	Power supply	Check power supply
	Internal wiring fault	Call your agent or qualified Technician
The appliance turns on, but the temperature is too high/low	Condenser blocked with dust	Call your agent or qualified Technician
	Doors are not shut properly	check doors are shut and seals are not damaged
	Appliance is located near a heat source or air flow to the condenser is being interrupted	Move the refrigerator to a more suitable location
	Ambient temperature is too high	Increase ventilation or move appliance to a cooler position
	Unsuitable foodstuffs are being stored in the appliance	Remove any excessive hot foodstuffs or blockages to the fan
The appliance is unusually loud	Appliance is overloaded	Reduce the amount of food stored in the appliance
	The appliance has not been installed in a level or stable position	Check installation position and change if necessary

Technical specification:

Model	Voltage	Power	Current	Temperature Range	Capacity Gross (litres)	Dimensions HxWxD(mm)	Weight (kg)
E1R6871N1	230V 50Hz	300W	2.0A	+0~+8℃	452L	680x710x2010	73KG
E1F6871N1	230V 50Hz	380W	2.0A	-18~-22℃	452L	680x710x2010	79KG
E1R1371N2	230V 50Hz	330W	2.0A	+0~+8℃	990L	1340x710x2010	105KG
E1F1371N2	230V 50Hz	550W	2.3A	-18~-22℃	990L	1340x710x2010	110KG

Electrical Wiring

The plug is to be connected to a suitable mains socket.

Appliances are wired as follows:

Live wire (coloured brown) to terminal marked L

Neutral wire (coloured blue) to terminal marked N


Earth wire (coloured green/yellow) to terminal marked E

All appliances must be earthed, using a dedicated earthing circuit.

If in doubt consult a qualified electrician.

Electrical isolation points must be kept clear of any obstructions. In the event of any emergency disconnection being

required they must be readily accessible.

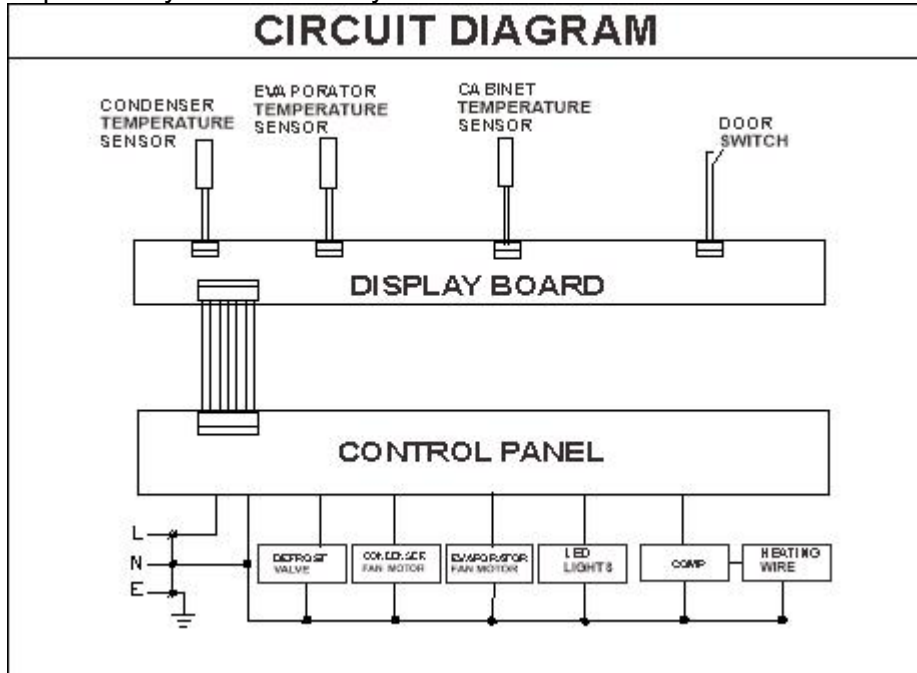

Disposal

EU regulations require refrigeration product to be disposed of by specialist companies who remove or recycle all gasses, metal and plastic components.

Consult your local waste collection authority regarding disposal of your appliance. Local authorities are not obliged to

dispose of commercial refrigeration equipment but may be able to offer advice on how to dispose of the equipment locally.

Compliance

Parts have undergone strict product testing in order to comply with regulatory standards and specifications set by

international, independent, and federal authorities.

Products have been approved to carry the following symbol:



