

### GAS SOLID TOP -COUNTERTOP




- External paneling in stainless steel
- Work surface in AISI 304, 1.2 mm thick
- Extra-thick radiant plate with reinforcement for proper heat distribution, equipped with central cut-out
- Heating with high-power circular steel burner
- Reaches a temperature of 450°C at the centre of the plate and 200°C near the edges
- Complete with pilot burner and safety thermocouple
- Gas supply controlled by safety valve
- Automatic ignition with piezoelectric ignitor
- Plate dimensions 300 x 500 mm
- Ergonomic control panel with controls tilted toward the operator
- Height-adjustable stainless steel feet

#### TECHNICAL SPECIFICATIONS

|                          |             |
|--------------------------|-------------|
| Dimensions (mm)          | 400x700x250 |
| Volume (m <sup>3</sup> ) | 0,20        |
| Weight (kg)              | 50          |

#### GAS CONNECTION

|                    |   |
|--------------------|---|
| kW                 | 6 |
| UNI ISO 7/1 R 1/2" |   |
| Cold water inlet   |   |

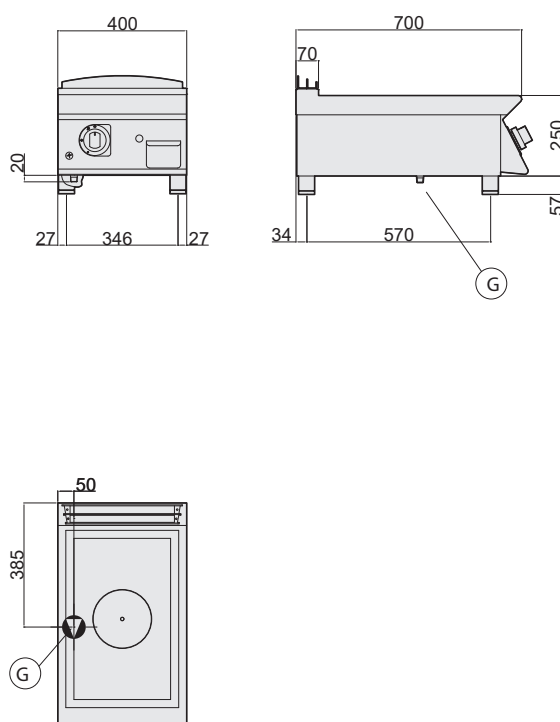

- Ⓐ water fill
- Ⓒ hot water fill
- Ⓔ electrical input
- Ⓕ cold water fill
- Ⓖ gas inlet
- Ⓗ water drain