

## UG515DL-1

Easyline, Undercounter Glasswasher, 500x500 mm, Double wall, Rinse pump H.T.R. system



### TARGET

Solutions: Coffee shops/Wine bars

### TYPE

Family: Professional dishwasher • Subfamily: Undercounter Glasswasher • Serie: Easyline • Basket dimensions: 500x500 mm • Power connection: 400 V 3N~ / 12 A / 7,3 kW / 50 Hz • Simultaneous heating: Yes • Width: 600 mm • Depth: 600 mm • Height: 720 mm • Depth with open door: 925 mm • Usable load height: 307 mm • Maximum dishes diameter: 300 mm

### AESTHETICS

Led color: Green

### FUNCTIONS

Functionality: Triple filter, HTR, Door clearance 307mm

### PROGRAMS

Programs: Boiler 71°C/Tank 60°C - 1'20"; Boiler 85°C/Tank 60°C - 1'10"; Boiler 85°C/Tank 60°C - 2'; Boiler 85°C/Tank 60°C - 3'; Boiler 71°C/Tank 60°C - 2'10"; Boiler 85°C/Tank 60°C - 4'10" • Drain and self cleaning cycle: Yes • Maximum basket/hour: 40 • Maximum dishes/hour: 1080

## ELECTRICAL CONNECTION

## INTERFACE

Panel: Easyline • Display: 8 digit • Number of buttons: 5 • On/Off button: Yes • Rinse aid missing alert: Yes • Detergent missing alert: Yes • Cycle progress alert: Yes • End-cycle alert: Yes • Manual diagnostic: Yes

## CONSTRUCTION

Tank: Deep drawn • Tank construction: Double wall • Tank material: Stainless steel AISI 304 • Tank filter: Stainless steel • Door: Double wall • Back panel: Galvanized • Washing spray arm: 2 in stainless steel • Balanced door: Yes • Rinse spray arm: 2 in stainless steel • Door gasket: On 3 sides • Rack guides: Embossed • Tank capacity: 11 l • Boiler capacity: 6 l • Noise: Lpa 56,5 dBA • Protection class: IPX4 • Adjustable feet: 15 mm • Drain max. height: 600 mm

## CONSUMPTION AND CONNECTIONS

Tank heating element: 2000 W • Boiler heating element: 6000 W • Washing pump: 700 W • Default connection: 6700 W • Optional electrical connection: 230 V 3~ / 21 A / 7,3 kW / 50 Hz; 230 V~ / 15 A / 3,4 kW / 50 Hz (NC); 230 V~ / 20 A / 4,5 kW / 50 Hz (NC); 230 V~ / 22 A / 5,0 kW / 50 Hz • Water cycle consumption: 2,3 l • Inlet pressure: 100-600 kPa • Warm water connection: Cold 15°C • Max temperature inlet water: 60°C • Max water hardness: 12°fH - 7°dH

## LOGISTIC INFORMATION

Product dimensions WxDxH: 600x600x720 mm

## EQUIPMENTS




Detergent (red) hose length: 2,2m • Peristaltic detergent doser: Electronic control • Detergent load: 1,5 l/h • Peristaltic rinse-aid doser: Electronic control • Rinse aid (blue) hose length: 2,2m • Soft Start: Yes • Rinse load: 0,4 l/h • Boiler thermostat: Yes default ON • Conductivity sensor: Si • Drain pump with 3 stage filter system: Yes • Rinse pump H.T.R. system: Yes • Partial renewal of water in the tank and built-in drain pump: Yes • Automatic start: Yes, default OFF

## ACCESSORIES INCLUDED

Flat basket: 1x WB50G02 Drain hose: Yes - 2m Water supply hose: Yes - 1,5m

## OPTIONAL

PHOOS02: Suitable for: Dishwashers and Hood type 500, 241 mm PHOOS01: Suitable for: Dishwashers and Hood type 500WH00S01: Suitable for: Dishwashers and Hood type 500; Hood type 600WH00C01: Suitable for: Dishwashers and Hood type 500; Hood type 600WS5: Suitable for: Dishwashers 500, 595 mm KITSONLIV: Suitable for: Glasswashers 400; Dishwashers and Hood type 500; Hood type 600PB50D01: Suitable for: Dishwashers and Hood type 500, 500 mm

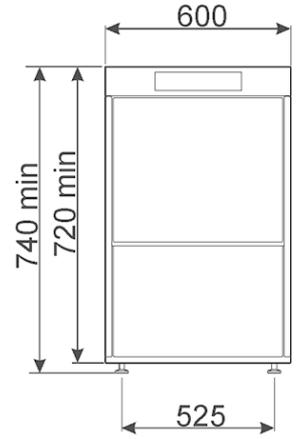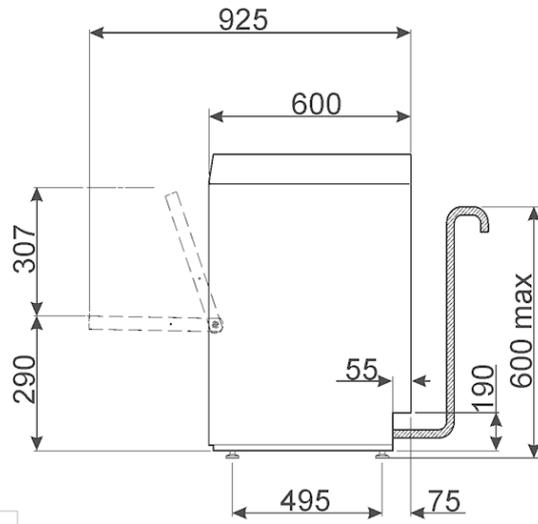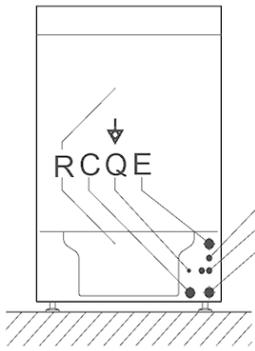

Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO FILLER HOSE
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
S	TUBO DI SCARICO DRAIN HOSE
R	PANNELLO RETRO LOWER BACK PANEL

