

Combi steamer Silversteam 711D



Description

The Bartscher combi steamer from the Silversteam series with electronic control and 7 shelves in 1/1 GN format – it's the ideal partner for every kitchen. The rack control function allows diverse meals to be prepared at different times. What a relief that the Silversteam has everything under control for you!

Features

- Power load: 9,6 kW | 400 V | 50 Hz
- Equipment connection: 3 NAC
- Temperature range: 50 °C to 300 °C
- Control unit: Touch
- Functions: Circulating air
Steam
Combi-steaming
Low temperature cooking
Delta-T cooking
Reversing motor direction (fan wheels)
Steam production by means of direct injection
- Rack control: Yes
- Continuous operation: Yes
- Vapour extractor: Yes
- Core temperature sensor connection: Side
- USB connection: Side
- Fan speed: 3 levels

▶ Continue on the next page




▶ Up to 7 x 1/1 GN or 600 x 400 mm



- ▶ Rack control
 - ✓ To enable the selection of a program for each shelf



- ▶ Electronic control with 600 programs (300 preinstalled, 300 programmable); up to 9 cooking phases per program

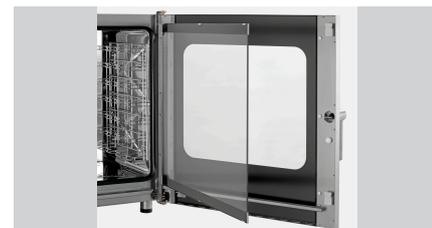

- ▶ Double door glazing, inner door can be opened easily for cleaning
- ▶ Vapour extractor is easy to regulate

Combi steamer Silversteam 7111D



- Number of cooking programs: 300 pre-installed programs
300 configurable programs
- Number of cooking phases: 9
- Type of drawers: Crosswise
- Number of drawers: 7
- Distance between trays: 74 mm
- Water connection: 3/4"
- Time adjustment: 0 to 599 minutes
- Material cooking chamber: CNS 18/10
- Number of fans: 2
- Properties: Rounded baking chamber
Bearing rails can be detached
Double-winged door pane
LED lighting in door
Socket (500 W) for connection of an extractor hood
- LED display: Steaming
Delta-T cooking
Cooking phases
Core temperature
Fan speed
Program
Temperature
Time
- Including: 1 grid 1/1 GN
1 tray 1/1 GN
1 water supply hose
- Available on request: -
- Control lamp: -
- Series: Silversteam
- Temperature control: Stepless
- Interior lighting: Yes
- Format drawers: 1/1 GN
- Operating mode: 600 x 400 mm
Electro
- With cleaning system: No
- Material: CNS 18/10
- Important information: From a water hardness of 5° dH upwards, we urgently recommend fitting a suitable water softener and a water pressure of maximum 3 bar
- Size: W 890 x D 835 x H 850 mm
- Weight: 105.8 kg